



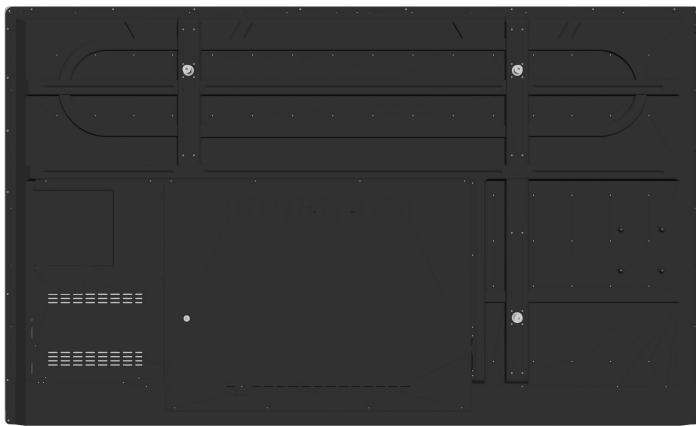

金盈创享光电
GOLDEN MARGINS

GM75ECTM

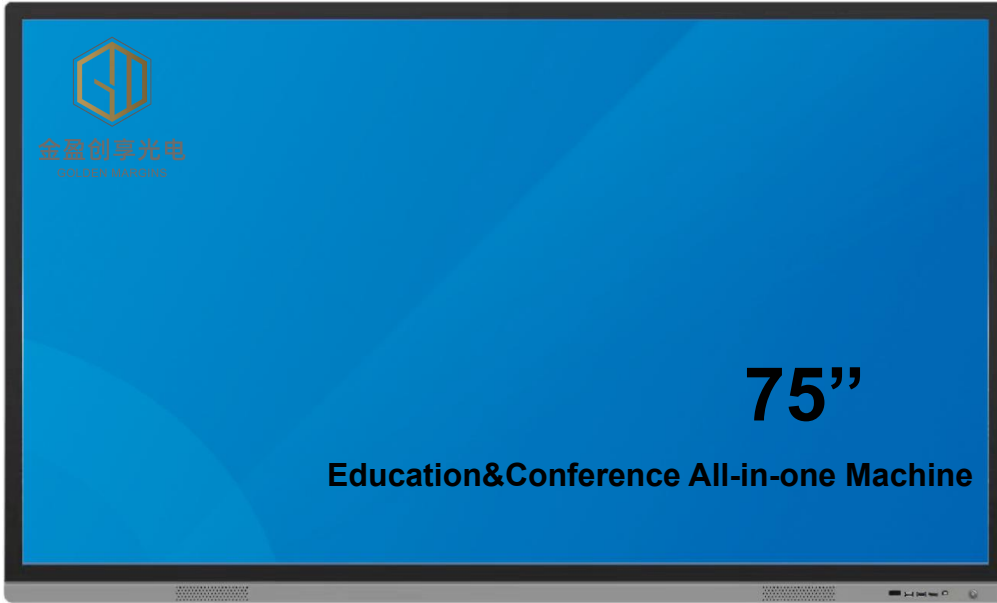

**multi-person
operate**



whiteboard



demo






conference



DLNA

1

TV interface

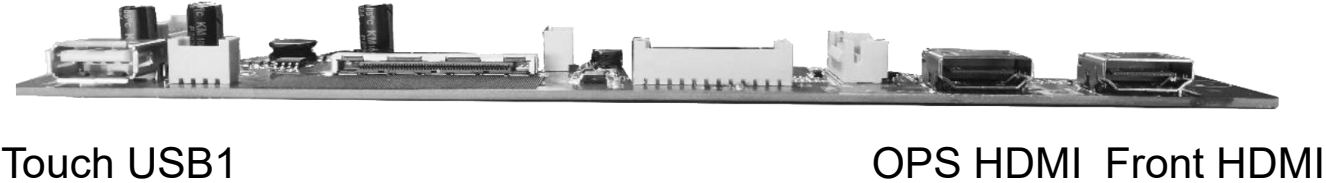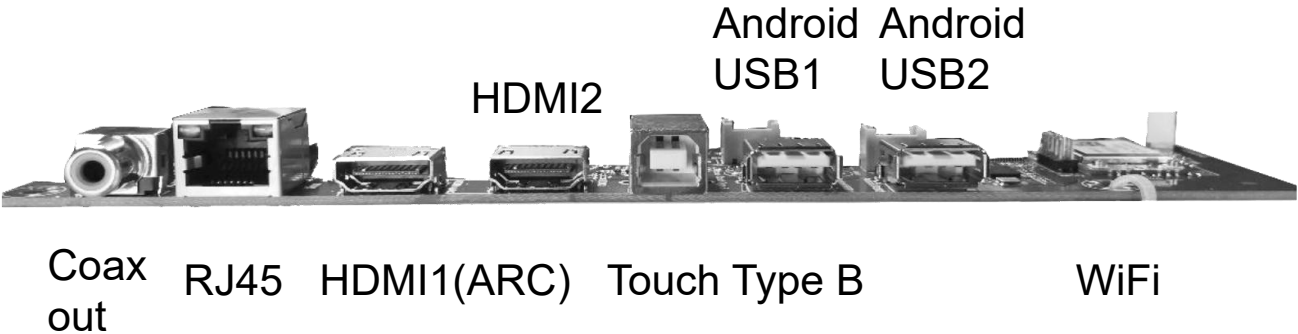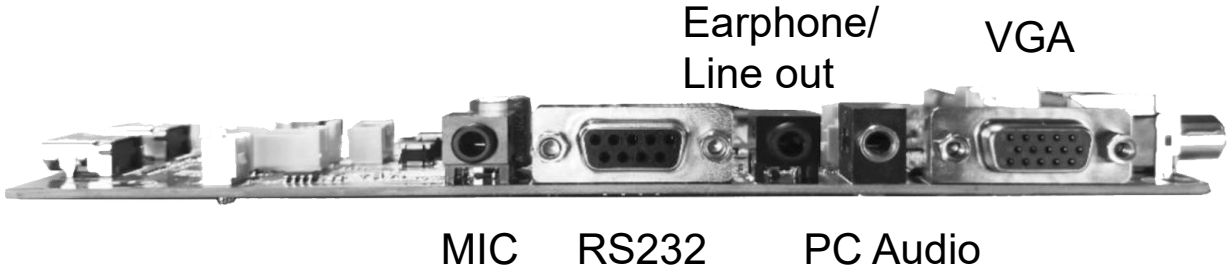

2

Features

- 3mm physical tempered anti-glare glass; strengthen the visual effect, improve the touch experience; standard 20-point touch, faster writing speed, the best writing experience.
- Built-in WIFI modules on the Android motherboard and PC in the machine, which are convenient for users to perform wireless transmission and network operations through WIFI.
- Support side-pull touch menu, support any channel writing, annotation, screenshot function; child lock function, button function can be shielded by setting, etc.
- Front-mounted expansion port: Front-mounted one-button start switch realizes three-in-one TV, computer, and energy-saving integrated switch function; convenient operation, simple and elegant appearance.
- Front remote control window is convenient for users to use the remote control to operate, set and debug the machine. Front speaker sound, honeycomb sound hole.
- Aluminum alloy outer frame, sandblasted anodized surface, iron shell back cover, active heat dissipation; ultra-narrow sandblasted face frame, ultra-narrow design, the face frame of the whole machine is only 26mm on one side.

3

Parameters

| Product parameters | |
|----------------------------------|---|
| Fuselage size | 1708.1x1040.6x91.1mm |
| Package size | 1848x1168x235mm |
| Electrical parameters | |
| Input voltage | rated: 100Vac~240Vac max: 90Vac~264Vac 50/60Hz |
| Maximum power consumption | 300W |
| Standby power | <0.5W |
| Compatible TV motherboard models | Network TV motherboard |
| Common parameters | |
| Color System | PAL/SECAM |
| Number of channels | ATV(200CH) |
| Input impedance | 75 Ω |
| Ypbrp input | 1 earphone terminals (black) |
| AV input | 1 AV output |
| USB | 2*2.0 |
| System configuration | Android 9.0 memory 3GB, EMMC 32GB |
| System configuration | 1 RJ45 network interface |
| Serial port interface | 1 RS232 serial interface |

| | |
|--------------------------------|-------------------------------------|
| network interface | 1 audio output |
| Sound output power | 8W + 1 audio output |
| Number of speakers | 2 |
| AV output | 1 AV output |
| Pc-rgb input | 1 D-sub 15pin terminal (blue) |
| Pc-rgb audio input | 1 headphone terminal (black) |
| HDMI | 2 HDMI terminals |
| TF | 1 TF card slot |
| Coaxial output | 1 coaxial output |
| TV input | 1 TV input |
| RJ45 network cable interface | 1 |
| WiFi module | 1 |
| External device touch | 1 |
| Surround sound | have |
| Listen alone | have |
| Touch screen parameters | |
| Touch technology | Capacitive induction technology |
| Inductive object | Fingers, capacitive touch pens, etc |
| Touch pressure | Zero pressure |
| Multipoint support | 10 o'clock or 40 o'clock |
| Response time | 6ms |
| Coordinate output | 4096(W)×4096(D) |

| | |
|--------------------------------|---|
| Communication interface | USB (USB powered) |
| working voltage | DC 5.0V \pm 5% |
| Touch screen glass | Fully toughened Ag anti glare glass, light transmittance: > 90% |
| Drive | Drive free |
| Operating system | Support win 7 / 8, win 10, / Linux, etc |
| Service life | 8000000 clicks |
| External light resistance test | Full angle anti ambient light irradiation |
| LCD parameters | |
| Backlight type | 75 inches |
| Display area | TFT LED |
| Resolving power | 1650.24 \times 928.26mm |
| Brightness | 3840 \times 2160 |
| Contrast ratio | 450cd/m ² |
| Display color | 1.07B |
| Power waste | Less than 220W |
| Response time | 8.0ms max |
| Viewing angle | 178 degrees horizontal and 178 degrees vertical |
| Service life | 50000h(min.) |

| | |
|-----------------------------------|------------------------------------|
| Front port | |
| USB 2.0 | 1 (dual channel USB) |
| HDMI | 1 (input to TV motherboard) |
| USB Touch | 1 (touch screen external computer) |
| USB 3.0 | 1 (dual channel USB) |
| Environmental parameters | |
| Workplace | indoor |
| Storage temperature | -20° C - 60° C |
| working temperature | -10° C - 50° C |
| Storage humidity | 10% - 90% RH, no condensation |
| Working humidity | 10% - 80% RH, no condensation |
| List of attachments | |
| 1.5m National standard power cord | 1 |
| Remote control | 1 |
| Battery | 1 |
| Antenna | 1 |
| Warranty card | 1 |
| Certificate | 1 |
| Wall mounted accessories | 1 |
| Instructions | 1 |